

LED GLASS & METAL

A design only made possible by today's LED technology, this fixture will surely captivate its audience with its unobtrusive styling. Coordinates with the 15805.

15806 BKT - Textured Black (Marine grade powder coat)

Cast Aluminum

3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver

3000K (-200/+125) / 80s CRI

4 W, 5.8 VA

Multiply fixture VA by the number of fixtures used to determine size of transformer

9V-15V AC/DC with no loss in output due to constant current technology

Tested to an L-70 of 40,000 hours

3000K = 140 Lm
3000K = 35 Lm/W

30" of useable #18-2, SPT-1W leads
Cable connector supplied

8" In-ground stake


15601 - Surface Mounting Flange
15607 - Surface Mounting Bracket

NA

Subjected to Highly Accelerated Life Testing - 3rd party reliability testing. Not for use with electronic transformers

Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
Footcandles	20.7	11.1	4.8	1.56	0.55	0.33	0.11	0.06	-

WT817

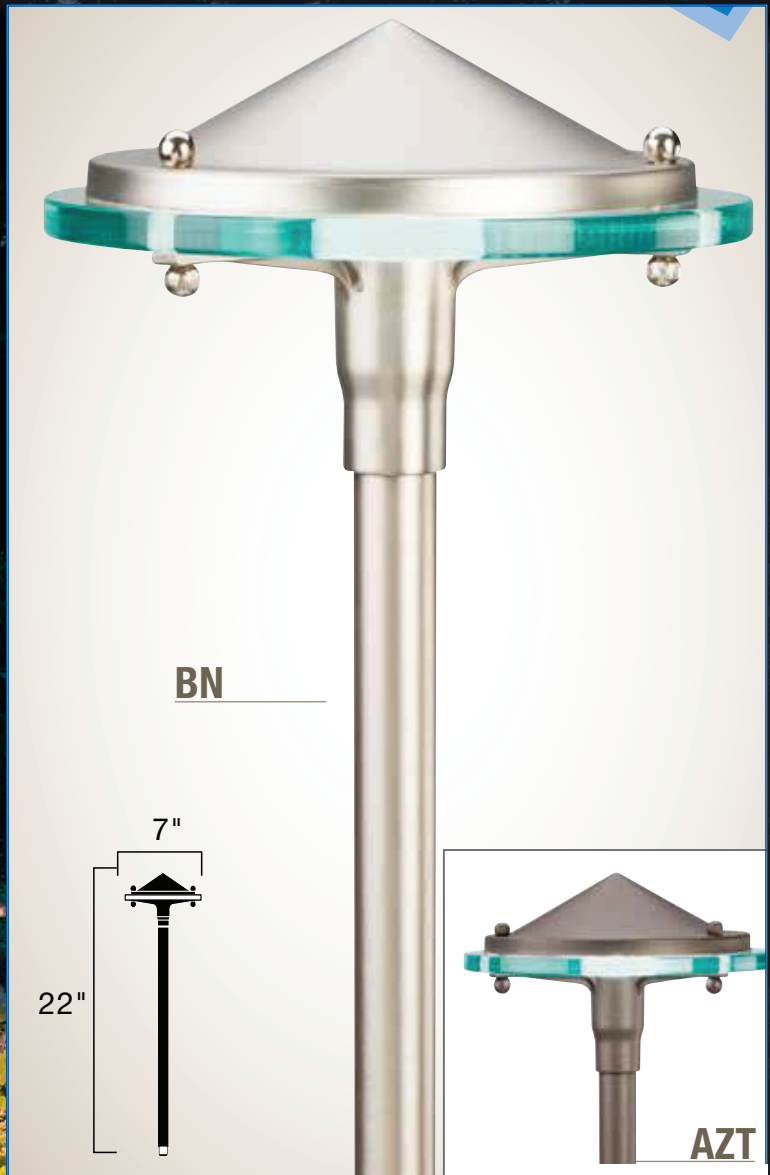

BN

AZT

Guaranteed not to burn out for 15 years (10 commercially)

POWERED BY
DESIGN PRO LED
TECHNOLOGY

WITH
Radiax™
OPTICS

Professional-grade LED lighting and system components, designed and engineered for optimum all-weather performance with natural lighting effects, deliver professional results.

LandLight
Enhance The Night

Enhance The Night - www.landlight.ca